



## W54460-MIN Relay Module

### Features

- The H2O Degree W54460-MIN is a wireless relay module.
- Device enables control of baseboard heaters, zone valves, etc. when used with a H2O Degree thermostat.
- Module is available in either 120 VAC or 208-240 VAC configurations.
- Module features 3 small LEDs that help verify device status.
  - Power
  - Link
  - Relay Status
- Module connects directly to baseboard heater or other electrical device to be controlled.
- Module includes an integrated industry standard 1/2" box connector for ease of mounting.
- Two year warranty.



### Overview

The H2O Degree Relay Module is a wireless mesh network line powered node with an integrated relay and current detector. The W54460-MIN is a wireless device for use in multiple applications. It provides a compact and economical solution for the control of devices such as baseboard heaters, zone valves and lighting. The Module may be used to control heating when paired with a H2O Degree thermostat.

## Ordering Information

Model	Description
W54460-MIN	Relay Module for 120/208-240 VAC
W54460-Z2E	Relay Module for 120/208-240 VAC with Z2E Bridge

8/2016



# W54460-MIN Relay Module

## Technical Specifications

### Technical Specifications

#### Specifications

Input Power 120 VAC or 208-240 VAC

#### Relay Specifications

Contact Rating: Up to 240 VAC @ 15A

Mechanical Life: 100,000 Operations (Approx. 20 years typical use)

#### Digital Input Specifications

Digital input dry contact for counting pulses from electric or water meter

LEDs: Power, Link, Relay Status

Device provides device status, device runtime and device current consumption in amps.

#### Regulatory approvals

US Complies with FCC CFR Part 15

European RADIO EN 300 328:v1.7.1

European EMC EN 301 489-17:V2.1.1

European SAFETY EN 60950-1:2005 (Ed. 2.0)

#### Radio

20 dBm output power

High sensitivity -106 dBm

16 channels (802.15.4 Channel 11 to 26)

2.4 GHz ISM band

#### Environmental

Operating temperature 0 to 30 degree C

Storage temperature -25 to 50 degrees C

#### Real Time Clock Specifications

Highly accurate real time clock keeps time even during power outage by using a small coin cell.

Real time clock is used to record time stamp for pulse counts from electric meters.

#### Physical Specifications


Dimensions: 2.9" L x 4.0" W x 2.0" H

Weight 0.65 lbs

#### Warranty

Two Years

### Wiring & Installation Information

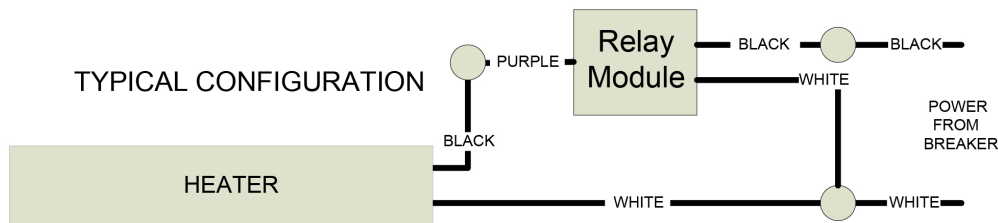

### Ordering Information

#### Model

W54460-MIN

W54460-Z2E

#### Description

Relay Module for 120/208-240 VAC

Relay Module for 120/208-240 VAC with Z2E Bridge

8/2016

#### H2O Degree

3580 Progress Drive, Suite L  
Bensalem, PA 19020

[www.h2odegree.com](http://www.h2odegree.com)

(215) 788-8485

[info@h2odegree.com](mailto:info@h2odegree.com)