

Features

- The H2O Degree WM-1400 is a 3/4" x 5" lay length pulse equipped cold or hot water meter for submetering applications.
- Available for hot or cold water applications.
- Equipped with pulse output to interface with H2O Degree pulse counter.
- Pulse Value: 1/10 gal. (standard), 1/1 gal. (specify when ordering.)
- Designed for horizontal installations only.
- State of California Approved.
- National Approved (NTEP) Certificate # 12-095.
- NSF-61-G Certified.
- Meets AWWA C712-10 Standards.
- Technical Specifications:
 - Max Flow Rate: 22 gpm
 - Nom Flow Rate: 11 gpm
 - Min Flow Rate (+/- 3%): 1/4 gpm
 - Max Work Pressure: 150 psi
 - Max Work Temp: 105 Degrees F (cold), 160 Degrees F (hot)
- The WM-1400 series water meter has a maximum flow rate of 20 gallons per minute with a pressure loss of approximately 12 psi at the stated maximum flow rate. For additional details visit the full specifications at www.h2odegree.com.
- Five year warranty.



Overview

The H2O Degree WM-1400 is a pulse equipped cold or hot water meter that is compatible with the H2O Degree wireless system.

The meter is a durable, highly accurate meter that comes equipped with a pulse output in a compact design. The polymer composite material consists of a 50% nylon blend that has high strength with good rigidity and is designed for horizontal installation only.

The magnetic drive, low torque register measures in gallons. Register is also magnet resistant and dry to prevent moisture intrusion. Finger strainer is installed to protect the meter from any incoming debris. Rugged design provides for stable accuracy in aggressive environments.


Ordering Information

Model	Description
WM1400H	Hot Water Meter 3/4 inch 22 gpm POLY 1 pulse/10 gallons (CA approved) includes couplings
WM1400C	Cold Water Meter 3/4 inch 22 gpm POLY 1 pulse/10 gallons (CA approved) includes couplings
WMST050	3/4 inch x 5 inch Spacer tube - for use with WM1400 and WM1600 series meters
M54130	Line Powered Pulse Counter - Indoor (4 channels)
M54230	Battery Powered Dry Contact Pulse Counter - Indoor (2 Channel)
M54232	Battery Powered Dry Contact Pulse Counter w/ Display indoor (2 Channels)

Technical Specifications

Technical Characteristics

Max Flow Rate22 gpm
 Nom Flow Rate.....11 gpm
 Min Flow Rate(+/- 3%).....¼ gpm
 Max Work Pressure.....150 psi
 Max Work Temp105°F (Cold), 160°F (Hot)
 Nom Pipe Size.....¾"
 Pulse Value.....1/10gal

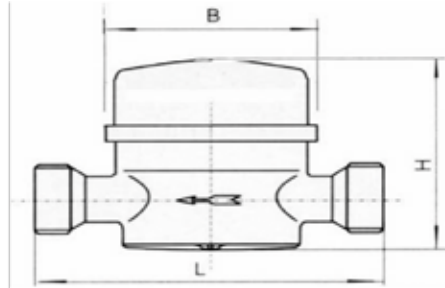

TYPE	SIZE	L	B	H	CONNECTION	WEIGHT
Single Jet	22 gpm	5"	3"	3½"	¾"	1.5lbs.

Accuracy Chart

