


## Features

- The H2O Degree WM-1500 is a pulse enabled 3/4" x 7 1/2" lay length multi-jet water meter for submetering applications.
- Meter is available for hot or cold water applications.
- Pulse Value: 1/10 gal. (standard), 1/1 gal. (specify when ordering)
- Compact Design.
- Removable register allows for pressure tests and line flush-outs without damaging internal components.
- Installation in both horizontal and vertical positions while adhering to AWWA C708 accuracies.
- NSF-61-G Certified.
- Meets AWWA C708 Standards.
- Technical Specifications
  - Material: 50% glass-reinforced nylon polymer
  - Max Flow Rate: 20 gpm
  - Normal Flow Rate (+/- 1.5%): 1-20 gpm
  - Nom Flow Rate: 15 gpm
  - Min Flow Rate (+/- 3%): 1/4 gpm
  - Max Work Pressure: 150 psi
  - Max Work Temp: 160 degrees F (Hot Water Meter), 105 degrees C (Cold Water Meter)
  - Nom Pipe Size: 3/4"
  - Pulse Value: 1/10 gal
- The WM-1500 series water meter has a maximum flow rate of 20 gallons per minute with a pressure loss of approximately 12 psi at the stated maximum flow rate. For additional details visit the full specifications at [www.h2odegree.com](http://www.h2odegree.com).
- Five year warranty.

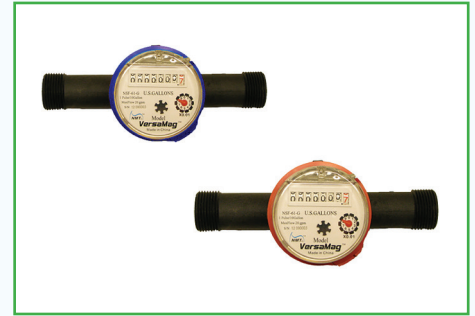

## Overview

The H2O Degree WM-1500 water meter is the most versatile multi-jet type water meter available for submetering applications.

Meter is available for hot or cold water applications. Along with its compact design, the removable register allows for pressure tests and line flush outs without damaging the internal components.

The WM-1500 is capable of being installed in both horizontal and vertical positions while adhering to AWWA C708 accuracies.

With all of these features, the WM-1500 is the complete meter for any submetering application.


## Ordering Information

Model	Description
WM1500H	Hot Water Meter 3/4 inch 20 gpm POLY 1 pulse/gallon includes couplings
WM1500C	Cold Water Meter 3/4 inch 20 gpm POLY 1 pulse/gallon includes couplings
WMST075	3/4 inch x 7.5 inch Spacer tube - for use with WM1000, WM1100, WM1500 and WM1800 series meters
M54130	Line Powered Pulse Counter - Indoor (4 channels)
M54130-O	Line Powered Pulse Counter - Outdoor (4 channels)
M54230	Battery Powered Dry Contact Pulse Counter - Indoor (2 Channel)
M54232	Battery Powered Dry Contact Pulse Counter w/ Display indoor (2 Channels)


## Technical Specifications

- Material: 50% glass-reinforced nylon polymer
- Max Flow Rate: 20 gpm
- Normal Flow Rate (+/- 1.5%): 1-20 gpm
- Nom Flow Rate: 15 gpm
- Min Flow Rate (+/- 3%): 1/4 gpm
- Max Work Pressure: 150 psi
- Max Work Temp: 160 degrees F (Hot Water Meter), 105 degrees C (Cold Water Meter)
- Nom Pipe Size: 3/4"
- Pulse Value: 1/10 gal

## Accuracy Chart

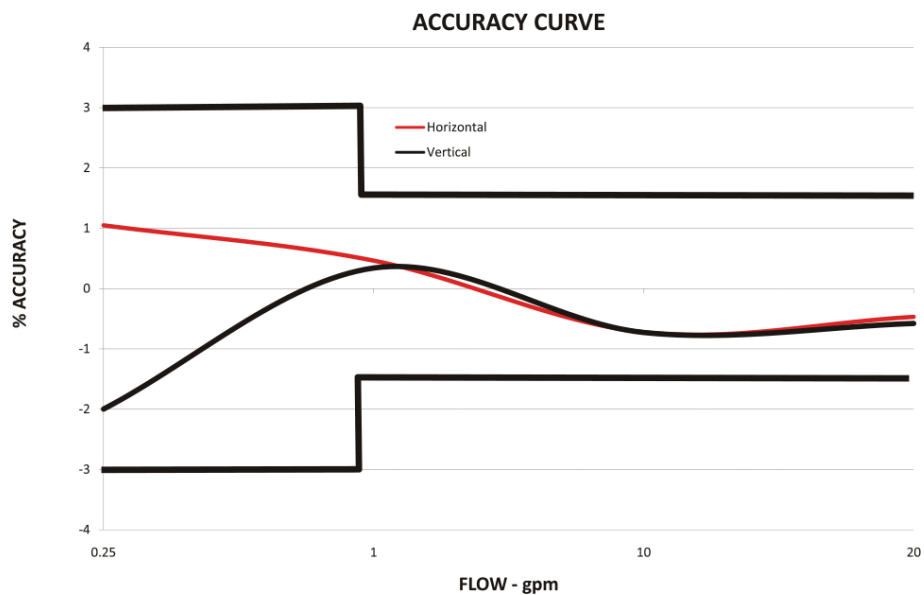

## Dimensions

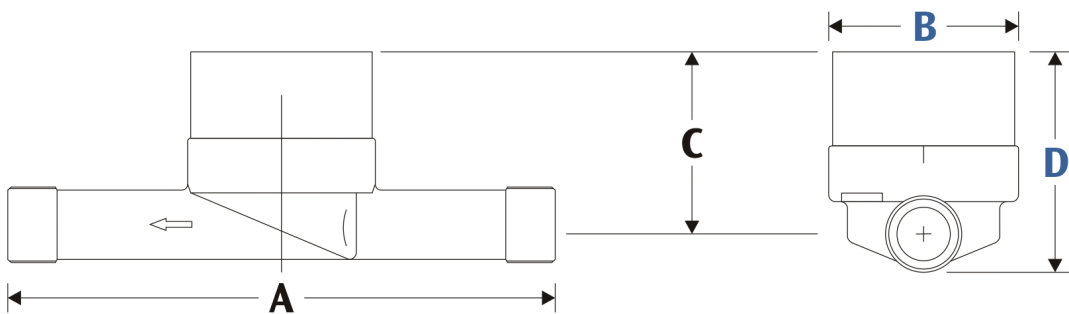

**A - 7.5"**  
**B - 2.5"**  
**C - 3.6"**  
**D - 4.2"**  
**Wt 0.75lb**